



AC FAN SK825AP 80 X 80 X 26mm(3") 19~10 CFM

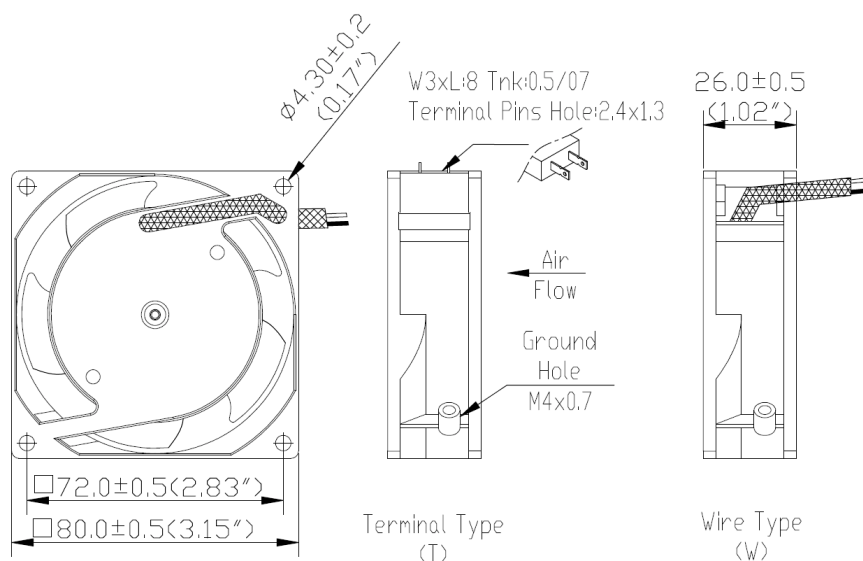

馬達 Motor	Shaded pole, impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball or sleeve available
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ball bearing -20°C~+70°C; Sleeve bearing -10°C~+55°C
壽命 Life Expectancy	Ball bearing 60,000 hours at 60°C; Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	260gm(0.57 pound)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK825 P-Q Curves

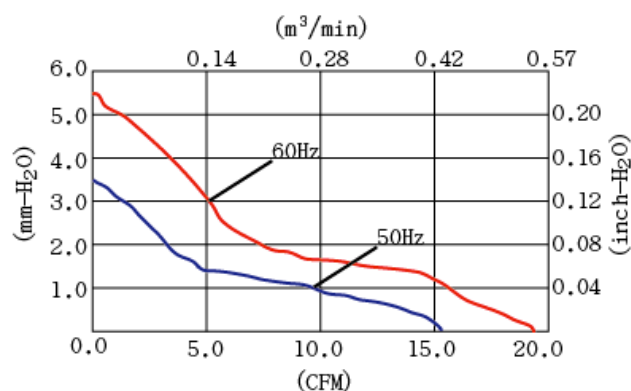

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM		最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O		噪音 Noise Level (dB)
SK825AP-11-1	110 (100V~120V)	50/60	0.17/0.15	15/13	2550/3200	0.42/0.54	15/19	3.5/5.5	0.14/0.22	27/34
SK825AP-11-2	110 (100V~120V)	50/60	0.09/0.08	10/9	2100/2550	0.34/0.42	12/15	2.1/2.8	0.08/0.11	27/29
SK825AP-11-3	110 (100V~120V)	50/60	0.07/0.06	7/6	1750/1850	0.28/0.34	10/12	1.5/1.6	0.06/0.06	25/30
SK825AP-22-1	220 (200V~240V)	50/60	0.08/0.07	15/13	2550/3200	0.42/0.54	15/19	3.5/5.5	0.14/0.22	27/35
SK825AP-22-2	220 (200V~240V)	50/60	0.06/0.05	10/9	2400/2950	0.40/0.51	14/18	2.9/4.3	0.11/0.17	23/24