




AC FAN SK938AP 92 X 92 X 38mm(3.5") 50~36 CFM

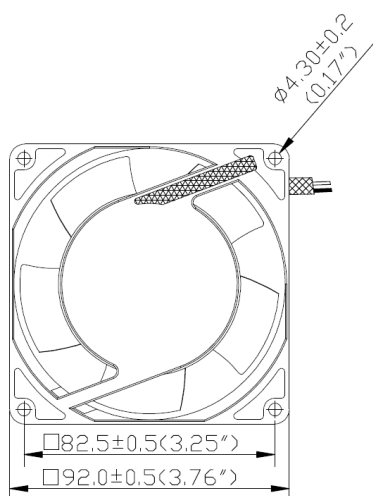

W3xL:8 Tnk:0.5/07
Terminal Pins Hole:2.4x1.3




Terminal Type
(T)

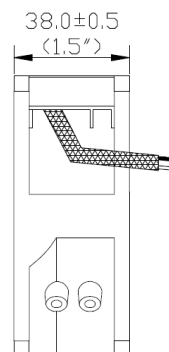

Wire Type
(W)

馬達 Motor	Shaded pole, impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball or sleeve available
接電方式 Connecting	T-Terminal push-on or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命 Life Expectancy	Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	450gm(0.99 pound)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK938 P-Q Curves

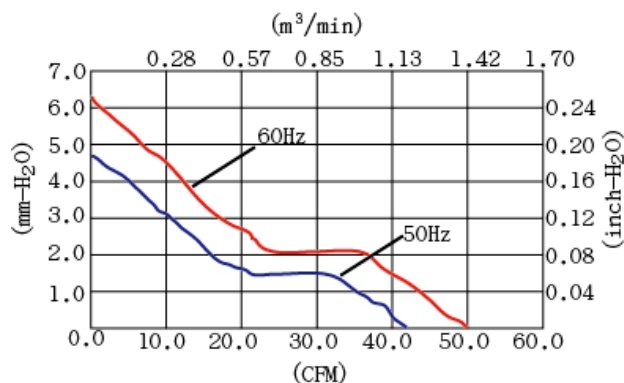

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM		最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O		噪音 Noise Level (dB)
SK938AP-11-1	110 (100V~120V)	50/60	0.12/0.11	14/12	2700/3200	1.19/1.42	42/50	4.7/6.3	0.19/0.25	34/39
SK938AP-11-2	110 (100V~120V)	50/60	0.07/0.06	11/9	2400/2550	1.16/1.25	41/44	4.1/4.2	0.16/0.17	32/35
SK938AP-11-3	110 (100V~120V)	50/60	0.05/0.04	7/5	2200/1950	1.08/1.02	38/36	3.3/2.4	0.13/0.09	30/27
SK938AP-22-1	220 (200V~240V)	50/60	0.06/0.05	14/12	2600/3050	1.19/1.42	42/50	4.7/6.3	0.19/0.25	35/40
SK938AP-22-2	220 (200V~240V)	50/60	0.05/0.04	11/9	2400/2550	1.16/1.25	41/44	4.1/4.2	0.16/0.17	34/36