



AC FAN SK125AP 120 X 120 X 26mm(4.5")70~48 CFM

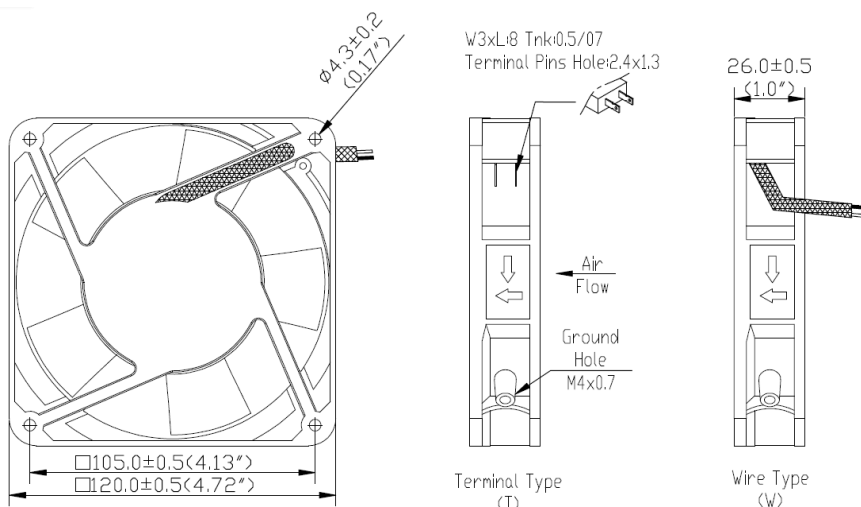

馬達 Motor	Shaded pole, impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball or sleeve available
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ball bearing -20°C ~ +70°C Sleeve bearing -10°C ~ +55°C
壽命 Life Expectancy	Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	390gm (0.86 pound)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK125 P-Q Curves

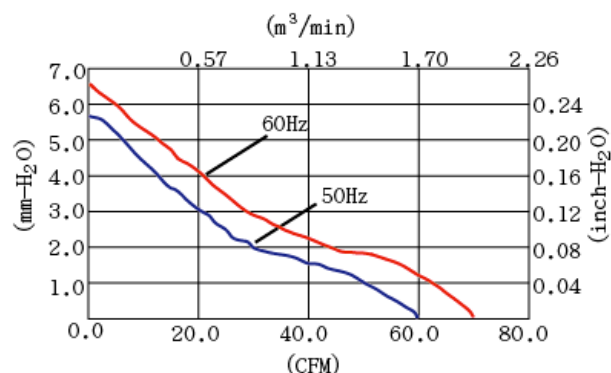

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m³/min	CFM	mm-H₂O	inch-H₂O	
SK125AP-11-1	110 (100V~120V)	50/60	0.25/0.20	17/15	2550/3000	1.7/2.0	60/70	5.7/6.6	0.22/0.26	43/48
SK125AP-11-2	110 (100V~120V)	50/60	0.09/0.08	12/10	2400/2600	1.6/1.8	57/62	4.6/3.8	0.18/0.15	42/39
SK125AP-11-3	110 (100V~120V)	50/60	0.06/0.05	8/6	2100/1900	1.4/1.4	50/48	2.8/1.8	0.11/0.07	39/35
SK125AP-22-1	220 (200V~230V)	50/60	0.09/0.07	17/15	2550/3000	1.7/2.0	60/70	5.7/6.6	0.22/0.26	44/48
SK125AP-22-2	220 (200V~230V)	50/60	0.06/0.05	12/10	2400/2600	1.6/1.8	57/62	4.6/3.8	0.18/0.15	42/45
SK125AP-22-3	220 (200V~230V)	50/60	0.05/0.04	8/6	2000/1750	1.4/1.4	50/48	2.8/1.8	0.11/0.07	36/31