



AC FAN SK127AP 127 X 127 X 38.5mm(5") 125 CFM

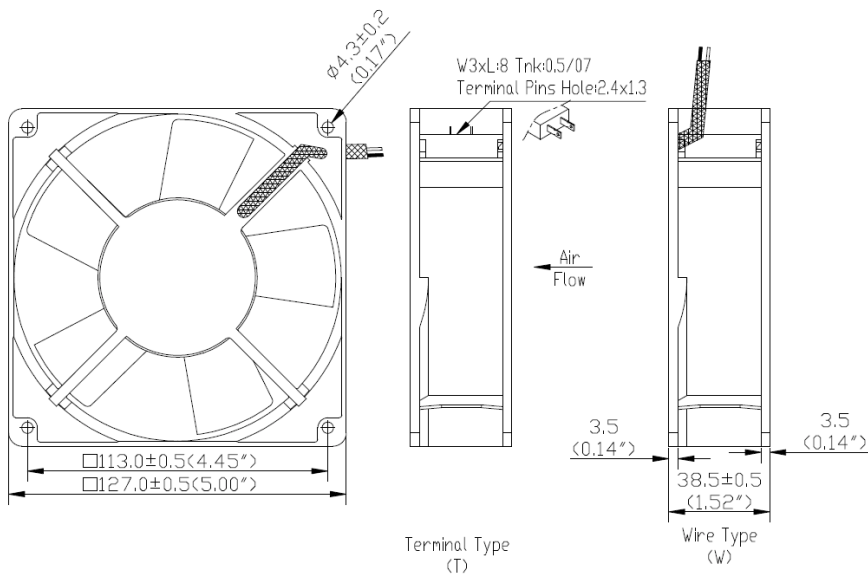

馬達 Motor	Shaded pole, impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball or sleeve available
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ball bearing -20°C ~ +70°C Sleeve bearing -10°C ~ +55°C
壽命 Life Expectancy	Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	590gm (1.3 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK127 P-Q Curves

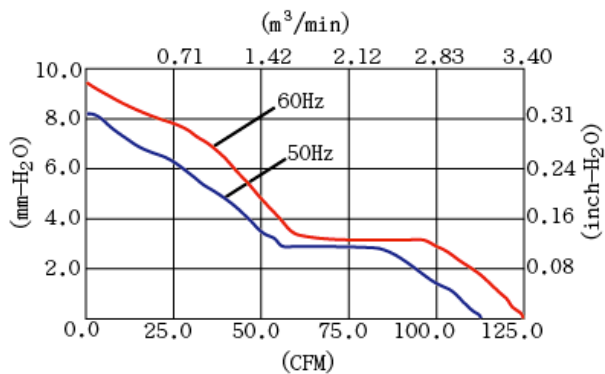

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK127AP-11-1	110 (100V~120V)	50/60	0.218/0.179	18.4/14.6	2700/3000	3.2/3.6 113/125	8.1/9.4 0.32/0.37	50/53
SK127AP-22-1	220 (200V~230V)	50/60	0.106/0.086	19.3/15.1	2700/3000	3.2/3.6 113/125	8.1/9.4 0.32/0.37	50/55