

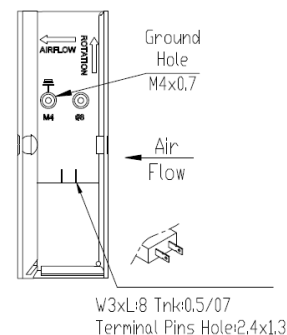


AC FAN SK162AP

Ø172 X 150 X 51mm(6")200~100 CFM

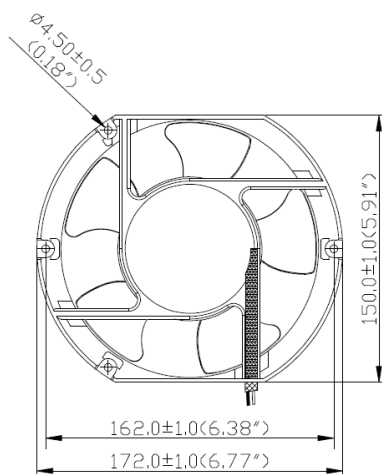

Terminal Type
(T)



Wire Type
(W)

馬達 Motor

Shaded pole, impedance protected
or thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or
Plated (AN)

風葉 Impeller

PBT thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connecting

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Ambient -20°C~+55°C

壽命 Life Expectancy

50,000 hours at 25°C
30,000 hours at 65°C


淨重 Net Weight

1,050gm(2.31 pounds)

檢定 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK162 P-Q Curves

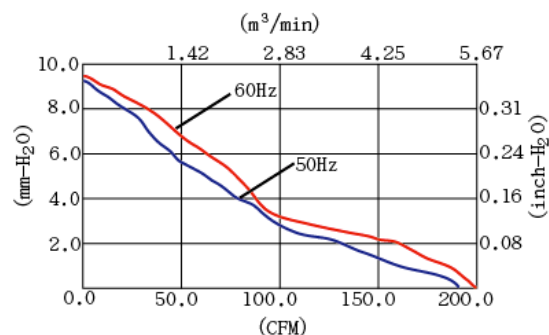

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM		最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O		噪音 Noise Level (dB)
SK162AP-11-1	110 (100V~120V)	50/60	0.56/0.50	38/36	2600/2850	5.4/6.5	190/200	16/20	0.63/0.79	50/53
SK162AP-11-2	110 (100V~120V)	50/60	0.28/0.27	25/23	2400/2000	4.5/4.2	159/148	13/14	0.51/0.55	40/42
SK162AP-11-3	110 (100V~120V)	50/60	0.21/0.19	22/20	2170/1300	3.2/2.9	113/100	10/8	0.40/0.31	32/34
SK162AP-22-1	220 (200V~230V)	50/60	0.30/0.25	38/36	2600/2850	5.4/6.5	190/200	16/20	0.63/0.79	50/53
SK162AP-22-2	220 (200V~230V)	50/60	0.17/0.16	25/23	2400/2200	4.5/4.2	159/148	13/14	0.51/0.55	40/42
SK162AP-22-3	220 (200V~230V)	50/60	0.13/0.12	22/20	2170/1300	3.2/2.9	113/100	10/8	0.40/0.31	32/34