



AC FAN SK172AP $\phi 172 \times 150 \times 51 \text{mm} (6") 235 \sim 96 \text{ CFM}$

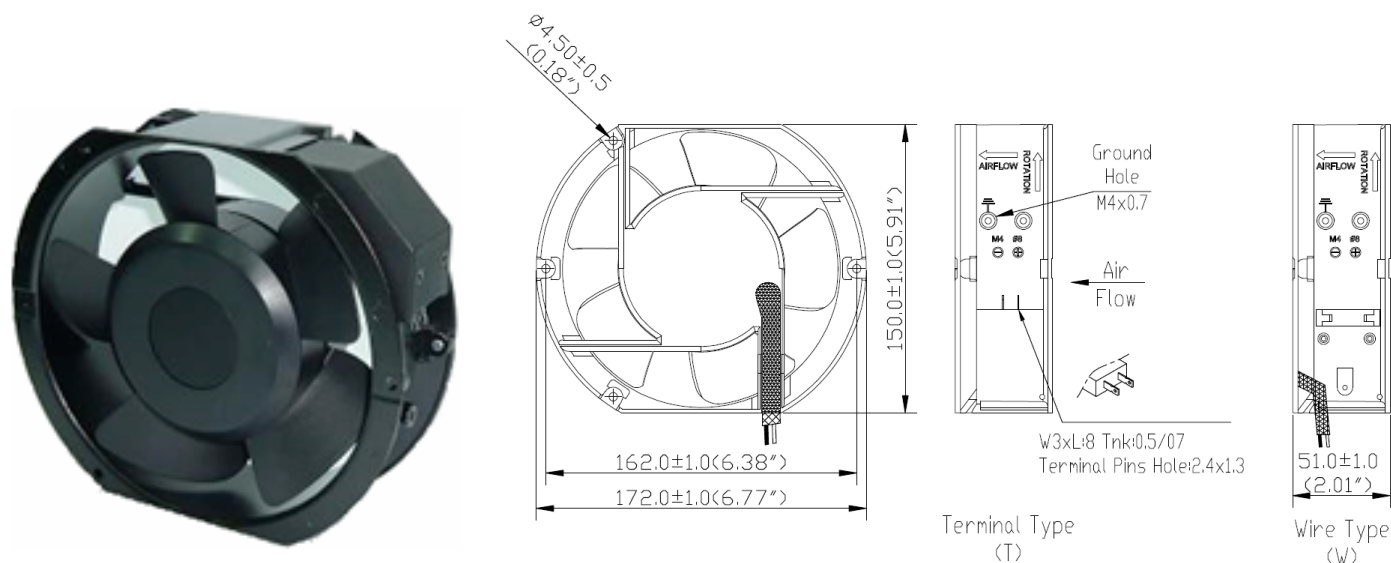

馬達 Motor	Single phase induction capacitor motor, thermally protected or impedance protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Ambient $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	1,050gm (2.31 pounds)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK172 P-Q Curves

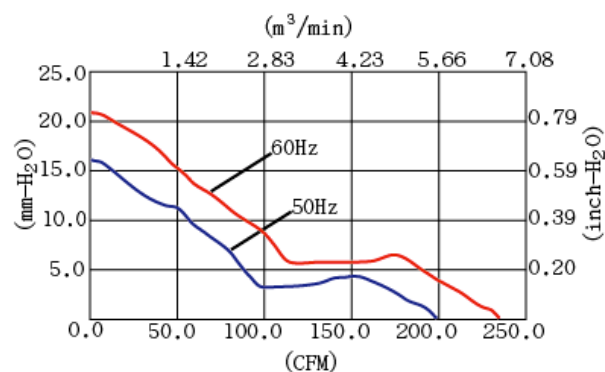

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
SK172AP-11-1	110 (100V~120V)	50/60	0.24/0.25	24/28	2800/3200	5.6/6.7	199/235	16/21	0.63/0.83	57/61
SK172AP-11-2	110 (100V~120V)	50/60	0.17/0.21	20/23	2550/2400	4.9/4.7	172/165	11/8.8	0.43/0.35	53/51
SK172AP-11-3	110 (100V~120V)	50/60	0.16/0.20	16/18	1450/1750	2.7/3.2	96/114	3.8/5.6	0.15/0.22	36/41
SK172AP-22-1	220 (200V~240V)	50/60	0.12/0.16	24/28	2800/3200	5.6/6.7	199/235	16/21	0.63/0.83	56/60
SK172AP-22-2	220 (200V~240V)	50/60	0.10/0.12	20/23	2550/2300	4.9/4.7	172/165	11/8.8	0.43/0.35	53/50
SK172AP-22-3	220 (200V~240V)	50/60	0.09/0.016	16/18	1450/1750	2.7/3.2	96/114	3.8/5.6	0.15/0.22	36/42