



AC FAN SK280AP

280X280 X 89mm (11") 1480~680 CFM

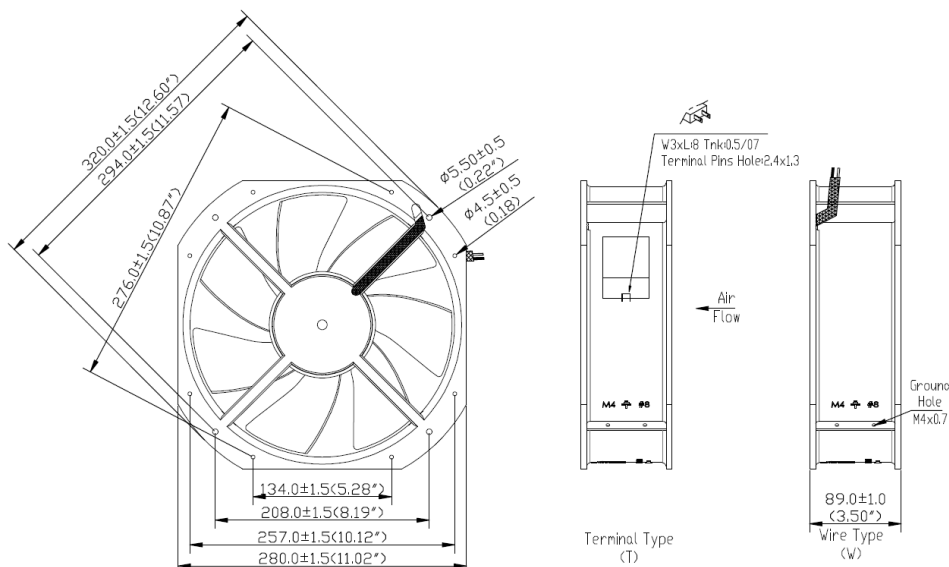

馬達 Motor	Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	PPS thermoplastic + glass fiber, UL 94V-0
軸承 Bearing Type	Two-ball Bearing
接電方式 Connecting	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	Recommended ambient range $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$
壽命 Life Expectancy	60,000 hours at 25°C 40,000 hours at 65°C
淨重 Net Weight	4.24 kg (9.34)
檢定 Safety Approvals	UL, CUL, TUV, CE, RoHS

SK280 P-Q Curves

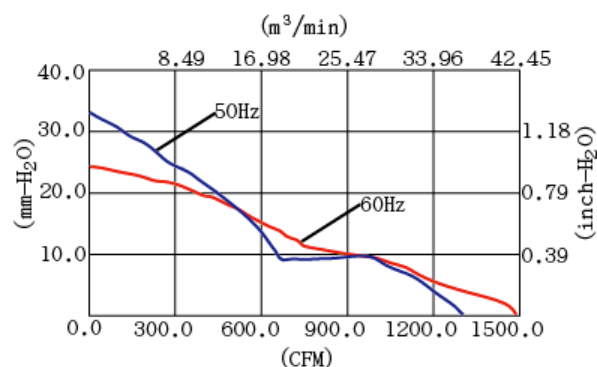

型號 Model No.	電壓 Rated VAC	頻率 Freq. Hz	電流 Rated Input Amp	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m ³ /min CFM	最大風壓 Max. Static Pressure mm-H ₂ O inch-H ₂ O	噪音 Noise Level (dB)
SK280AP-11-1	110 (100V~120V)	50/60	1.70/2.84	185/300	2800/3200	39.1/41.9 1380/1480	33.0/24.0 1.30/0.94	67/69
SK280AP-11-2	110 (100V~120V)	50/60	0.82/0.67	61/60	1500/1700	19.2/22.9 680/810	9.8/12.8 0.39/0.50	56/59
SK280AP-22-1	220 (200V~240V)	50/60	0.80/1.29	185/290	2800/3200	39.1/41.9 1380/1480	33.0/24.0 1.30/0.94	73/75
SK280AP-22-2	220 (200V~240V)	50/60	0.42/0.35	62/65	1500/1700	19.2/22.9 680/810	9.8/12.8 0.39/0.50	56/59