



AC FAN SK838AP

80X80X38mm(3.15"×1.5") 17~26 CFM



馬達	Motor	Shaded pole, impedance protected
外殼	Housing / Frame	Die-cast aluminum, Painted black (AP)
風葉	Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承	Bearing Type	Two-ball or sleeve available
接電方式	Connection	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	Ball bearing 60,000 hours at 40°C Sleeve bearing 30,000 hours at 40°C
淨重	Net Weight	370 gm (0.82 pound)
認證	Safety Approvals	UL, CUL, TUV, CE, RoHS

SK838 P-Q Curves

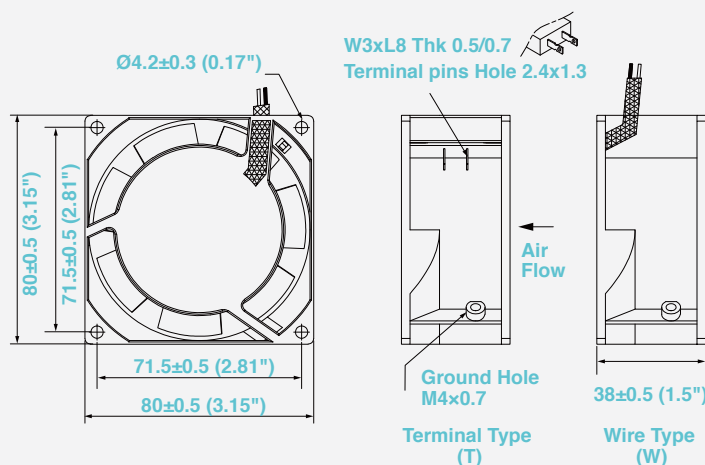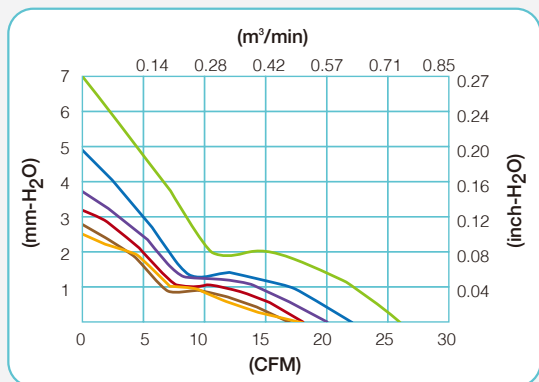

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK838AP-11-1	110 (100V~120V)	50/60	0.12/0.10	14/12	2700/3250	0.62/0.74 22/26	4.9/7.0 0.19/0.28	30/37
SK838AP-11-2	110 (100V~120V)	50/60	0.07/0.06	11/9	2250/2550	0.51/0.57 18/20	3.2/3.7 0.13/0.14	26/29
SK838AP-22-1	220 (200V~230V)	50/60	0.06/0.05	14/12	2700/3250	0.62/0.74 22/26	4.9/7.0 0.19/0.28	30/37
SK838AP-22-2	220 (200V~230V)	50/60	0.05/0.04	11/9	2450/2700	0.51/0.57 18/20	3.2/3.7 0.13/0.14	26/29
SK838AP-22-3	220 (200V~230V)	50/60	0.04/0.03	7/5	2200/2200	0.48/0.51 17/18	2.8/2.5 0.11/0.10	25/26

Customised Item : Frameless, Double Voltage, FG,RD

