

AC FAN SK225AP

225X225X80mm(8.86"×3.15") 620~735 CFM



馬達 Motor

Single phase induction capacitor motor, thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PC thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Recommended ambient range -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 40°C



淨重 Net Weight

2.88 kg (6.35 pound)

認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK225 P-Q Curves

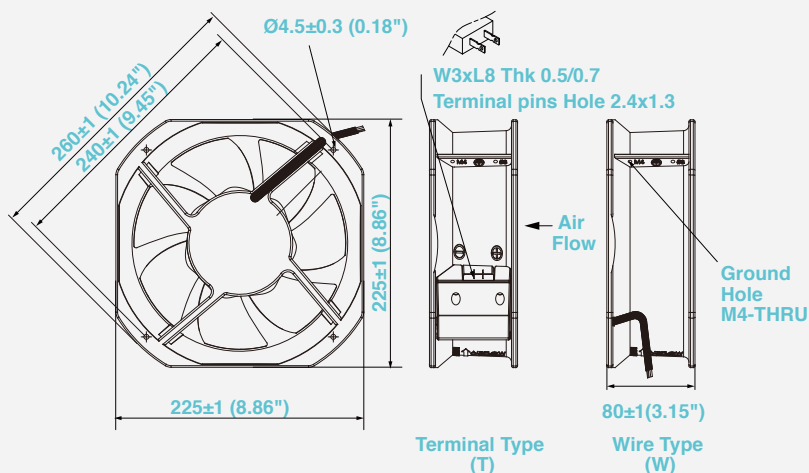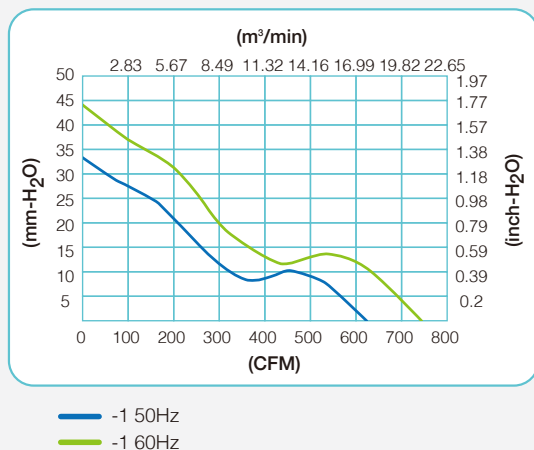

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m ³ /min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK225AP-11-1	110 (100V~120V)	50/60	0.97/0.97	77/105	2920/3450	17.6/20.8 620/735	33.0/43.9 1.30/1.73	63/67
SK225AP-22-1	220 (200V~240V)	50/60	0.44/0.44	87/105	2920/3450	17.6/20.8 620/735	33.0/43.9 1.30/1.73	63/67

Customised Item : Double Voltage

