

AC FAN SK280AP

280X280X89mm(11.02"×11.02"×3.5") 680~1465 CFM



馬達 Motor

Single phase induction capacitor motor,
thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PPS thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Recommended ambient range -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 40°C



淨重 Net Weight

4.24 kg (9.34 pounds)

認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK280 P-Q Curves

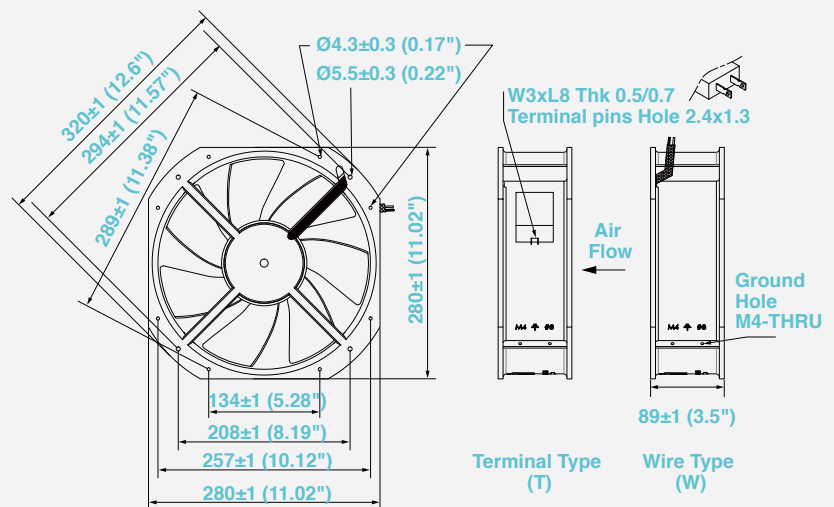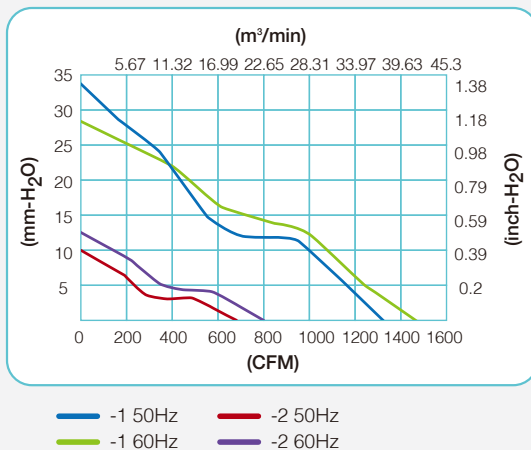

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK280AP-11-1	110 (100V~120V)	50/60	1.70/2.84	185/300	2800/3200	37.5/41.5 1325/1465	33.7/28.5 1.33/1.12	73/75
SK280AP-11-2	110 (100V~120V)	50/60	0.82/0.67	61/60	1500/1700	19.3/22.6 680/800	9.8/12.6 0.39/0.50	56/59
SK280AP-22-1	220 (200V~240V)	50/60	0.80/1.29	185/290	2800/3200	37.5/41.5 1325/1465	33.7/28.5 1.33/1.12	73/75
SK280AP-22-2	220 (200V~240V)	50/60	0.42/0.35	62/65	1500/1700	19.3/22.6 680/800	9.8/12.6 0.39/0.50	56/59

Customised Item : Double Voltage

