


# AC FAN SK92AP

92X92X25mm(3.62"×1") 19~33 CFM




|      |                     |                                                                          |
|------|---------------------|--------------------------------------------------------------------------|
| 馬達   | Motor               | Shaded pole, impedance protected                                         |
| 外殼   | Housing / Frame     | Die-cast aluminum, Painted black (AP)                                    |
| 風葉   | Impeller            | PBT thermoplastic + glass fiber , UL 94V-0                               |
| 軸承   | Bearing Type        | Two-ball or sleeve available                                             |
| 接電方式 | Connection          | T-Terminal push-on type or W-Lead wire type                              |
| 耐壓   | Dielectric Strength | 1 min. at 1,500VAC, 50/60Hz                                              |
| 溫度範圍 | Operating Temp      | Ball bearing -20°C~+70°C<br>Sleeve bearing -10°C~+55°C                   |
| 壽命   | Life Expectancy     | Ball bearing 60,000 hours at 40°C<br>Sleeve bearing 30,000 hours at 40°C |
| 淨重   | Net Weight          | 290 gm (0.64 pound)                                                      |
| 認證   | Safety Approvals    | UL, CUL, TUV, CE, RoHS                                                   |

## SK92 P-Q Curves

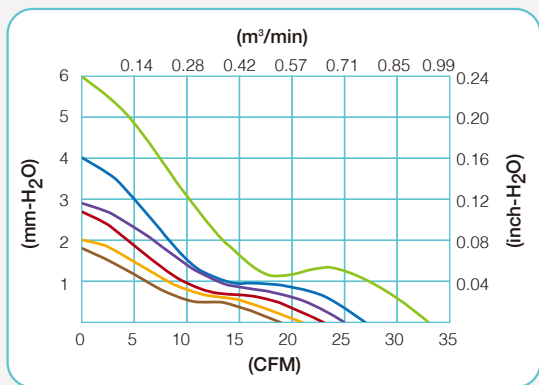

— -1 50Hz — -2 50Hz — -3 50Hz  
— -1 60Hz — -2 60Hz — -3 60Hz

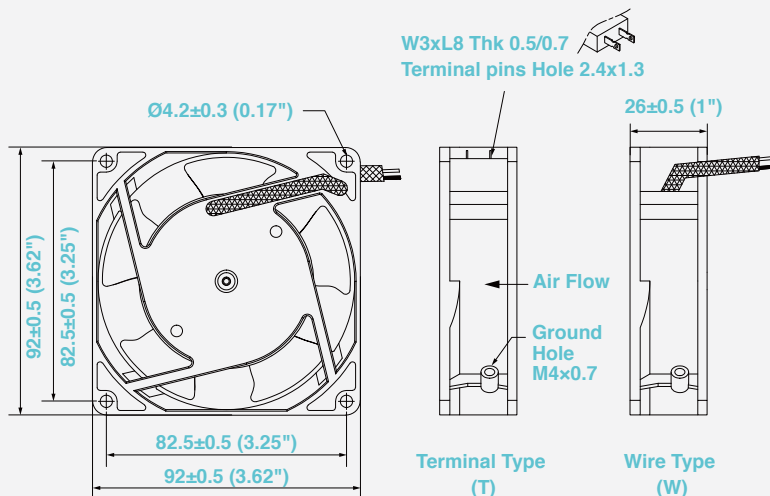

| Model No.   | Rated VAC          | Freq. Hz | Rated Input Amp | Rated Input Watt | Rated Speed RPM | Max. Air Flow<br>m³/min CFM | Max. Static Pressure<br>mm-H <sub>2</sub> O inch-H <sub>2</sub> O | Noise Level<br>(dB) |
|-------------|--------------------|----------|-----------------|------------------|-----------------|-----------------------------|-------------------------------------------------------------------|---------------------|
| 型號          | 電壓                 | 頻率       | 電流              | 功率               | 轉速              | 最大風量                        | 最大風壓                                                              | 噪音                  |
| SK92AP-11-1 | 110<br>(100V~120V) | 50/60    | 0.18/0.16       | 15/13            | 2400/3000       | 0.76/0.93 27/33             | 4.0/6.0 0.16/0.24                                                 | 31/39               |
| SK92AP-11-2 | 110<br>(100V~120V) | 50/60    | 0.09/0.08       | 10/9             | 2100/2300       | 0.65/0.71 23/25             | 2.7/2.9 0.11/0.11                                                 | 28/31               |
| SK92AP-11-3 | 110<br>(100V~120V) | 50/60    | 0.07/0.06       | 7/6              | 1700/1750       | 0.53/0.59 19/21             | 1.8/2.0 0.07/0.08                                                 | 26/26               |
| SK92AP-22-1 | 220<br>(200V~230V) | 50/60    | 0.08/0.07       | 15/13            | 2400/2900       | 0.76/0.93 27/33             | 4.0/6.0 0.16/0.24                                                 | 31/38               |
| SK92AP-22-2 | 220<br>(200V~230V) | 50/60    | 0.06/0.05       | 10/9             | 2100/2350       | 0.65/0.71 23/25             | 2.7/2.9 0.11/0.11                                                 | 28/32               |
| SK92AP-22-3 | 220<br>(200V~230V) | 50/60    | 0.05/0.04       | 7/6              | 1650/1850       | 0.53/0.59 9/21              | 1.8/2.0 0.07/0.08                                                 | 23/27               |

Customised Item : Frameless, Double Voltage

