

AC FAN SK160AP

160X160X62mm(6.3"×2.44") 345~380 CFM



馬達 Motor

Single phase induction capacitor motor, thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PBT thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Recommended ambient range -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 40°C


淨重 Net Weight

1.4 kg (3.09 pounds)


認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK160 P-Q Curves

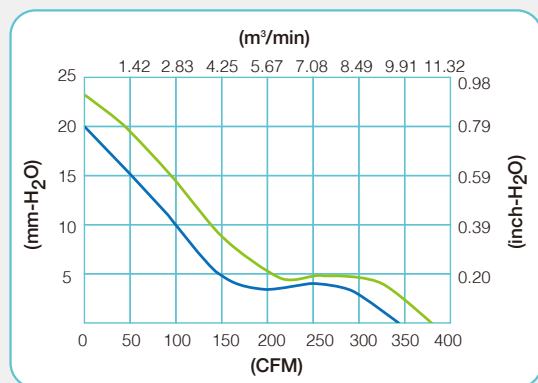

— -1 50Hz
— -1 60Hz

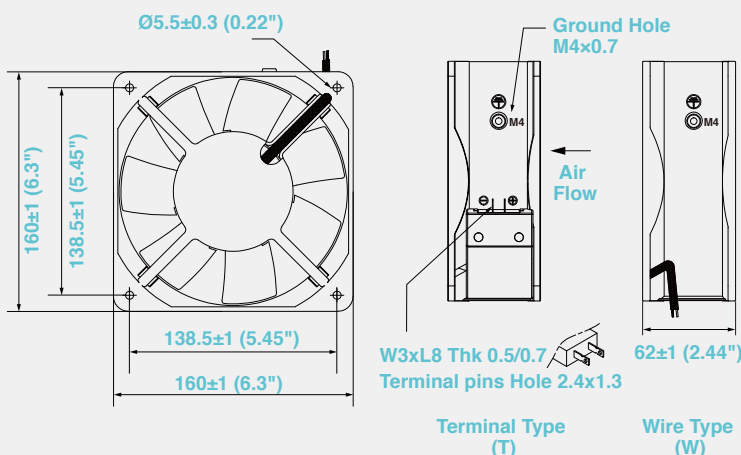

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H₂O inch-H₂O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK160AP-11-1	110 (100V~120V)	50/60	0.49/0.49	48/55	2800/3100	9.8/10.8 345/380	19.9/23.3 0.78/0.92	60/64
SK160AP-22-1	220 (200V~240V)	50/60	0.25/0.25	48/55	2800/3100	9.8/10.8 345/380	19.9/23.3 0.78/0.92	60/64

Customised Item : Double Voltage, FG,RD

