

AC FAN SK170AP

172X150X51mm(6.77"×5.91"×2.01") 280~315 CFM



馬達 Motor

Single phase induction capacitor motor, thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PC thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Ambient -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 40°C



淨重 Net Weight

1,013 gm (2.23 pounds)

認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK170 P-Q Curves

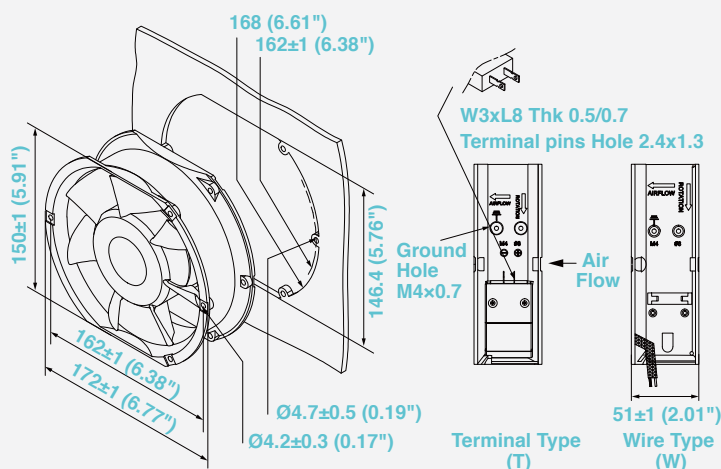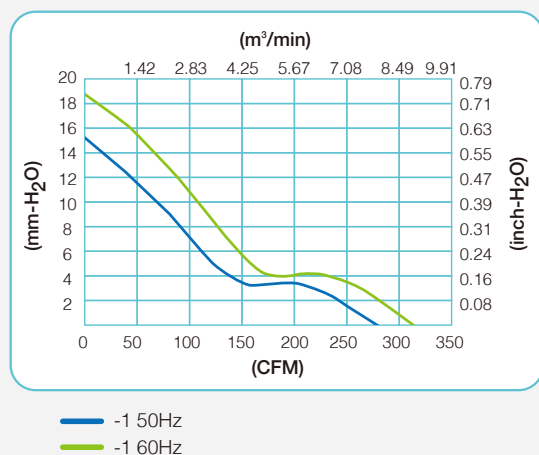

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m ³ /min CFM	Max. Static Pressure mm-H ₂ O inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK170AP-11-1	110 (100V~120V)	50/60	0.52/0.52	59/56	2675/3046	7.9/8.9 280/315	15.2/18.7 0.60/0.74	56/59
SK170AP-22-1	220 (200V~240V)	50/60	0.26/0.26	59/56	2609/2960	7.9/8.9 280/315	15.2/18.7 0.60/0.74	56/59

Customised Item : Frameless, Double Voltage, FG,RD

