

AC FAN SK180AP

180X180X65mm(7.09"×2.56") 366~420 CFM



馬達 Motor

Single phase induction capacitor motor, thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PC thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Recommended ambient range -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 40°C


淨重 Net Weight

1.8 kg (3.97 pounds)


認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK180 P-Q Curves

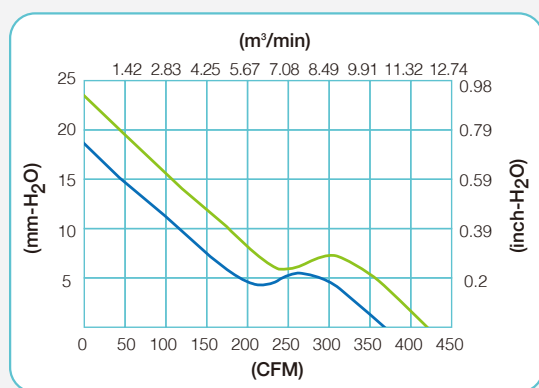

— -1 50Hz
— -1 60Hz

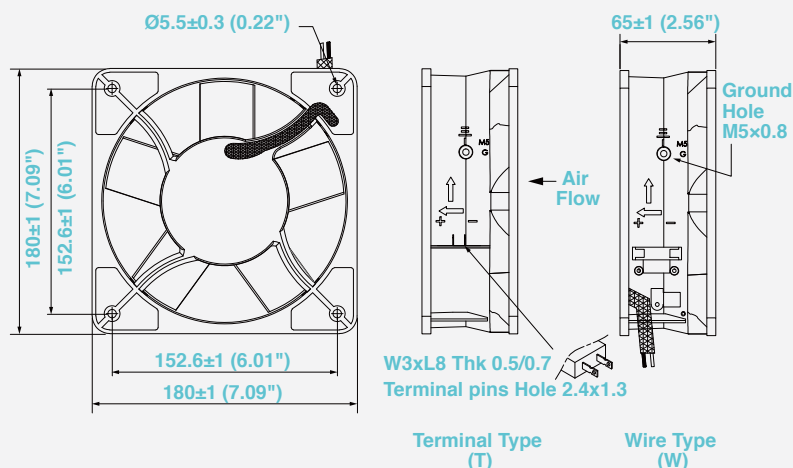

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H₂O inch-H₂O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK180AP-11-1	110 (100V~120V)	50/60	0.54/0.50	50/52	2800/3250	10.3/11.9 366/420	18.8/23.6 0.74/0.93	60/63
SK180AP-22-1	220 (200V~240V)	50/60	0.23/0.24	43/52	2800/3250	10.3/11.9 366/420	18.8/23.6 0.74/0.93	60/63

Customised Item : Double Voltage, FG,RD

