

AC FAN SK254AP

254X89mm(10"×3.5") 470~685 CFM



馬達 Motor

Single phase induction capacitor motor, thermally protected

外殼 Housing / Frame

Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

PC thermoplastic + glass fiber, UL 94V-0

軸承 Bearing Type

Two-ball bearing

接電方式 Connection

T-Terminal push-on type or W-Lead wire type

耐壓 Dielectric Strength

1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

Recommended ambient range -20°C~+70°C

壽命 Life Expectancy

60,000 hours at 40°C


淨重 Net Weight

2 kg (4.4 pounds)


認證 Safety Approvals

UL, CUL, TUV, CE, RoHS

SK254 P-Q Curves

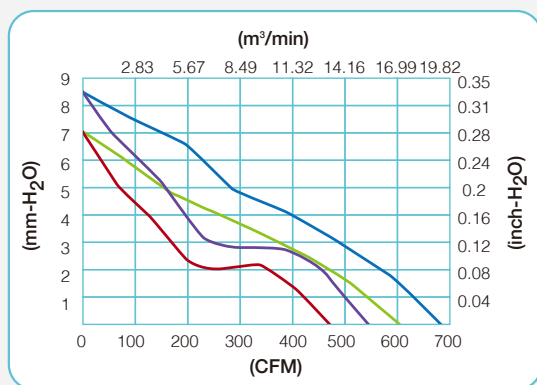

— -1 50Hz — -2 50Hz
— -1 60Hz — -2 60Hz

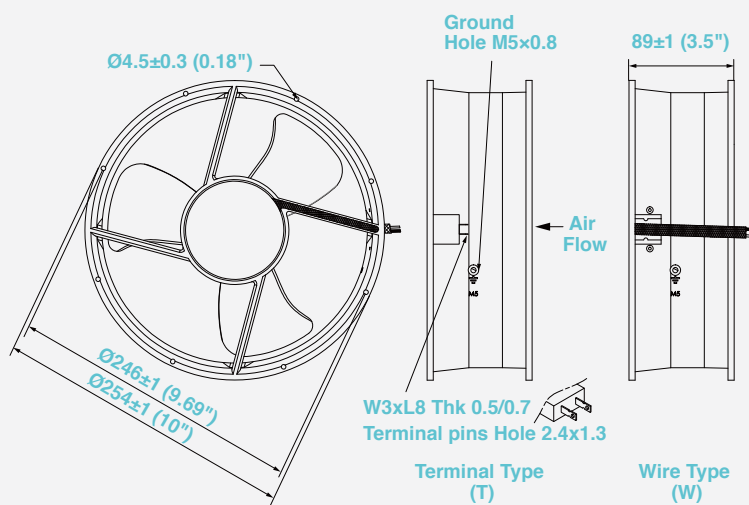

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min CFM	Max. Static Pressure mm-H₂O inch-H₂O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	噪音
SK254AP-11-1	110 (100V~120V)	50/60	0.55/0.62	60/67	2100/1800	19.4/17.1 685/605	8.6/7.1 0.34/0.28	61/58
SK254AP-11-2	110 (100V~120V)	50/60	0.22/0.24	34/37	1400/1600	13.3/15.5 470/546	7.0/8.6 0.28/0.34	54/56
SK254AP-22-1	220 (200V~240V)	50/60	0.26/0.30	60/67	2100/1800	19.4/17.1 685/605	8.6/7.1 0.34/0.28	61/58
SK254AP-22-2	220 (200V~240V)	50/60	0.16/0.14	34/37	1400/1600	13.3/15.5 470/546	7.0/8.6 0.28/0.34	54/56

Customised Item : Double Voltage, FG,RD

