



AC FAN SK109AP

120X120X38mm(4.72"×1.5") 55~105 CFM



馬達	Motor	Shaded pole, impedance protected
外殼	Housing / Frame	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉	Impeller	PBT thermoplastic + glass fiber, UL 94V-0
軸承	Bearing Type	Two-ball or sleeve available
接電方式	Connection	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	Ball bearing -20°C~+70°C Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	Ball bearing 60,000 hours at 40°C Sleeve bearing 30,000 hours at 40°C
淨重	Net Weight	550 gm (1.2 pounds)
認證	Safety Approvals	UL, CUL, TUV, CE, RoHS

SK109 P-Q Curves

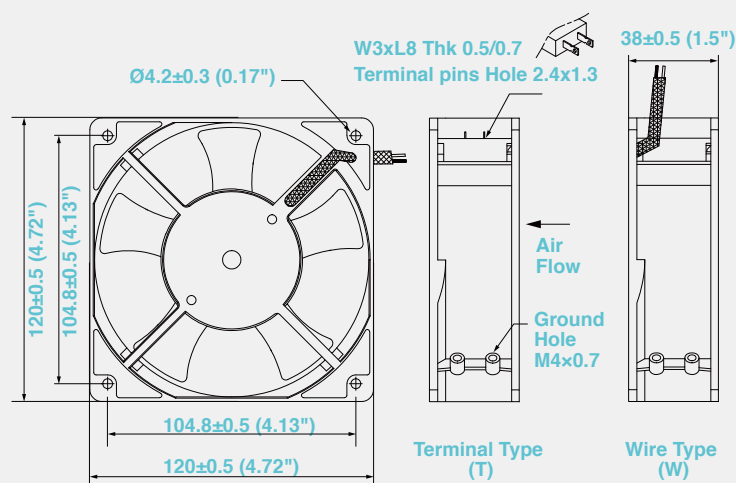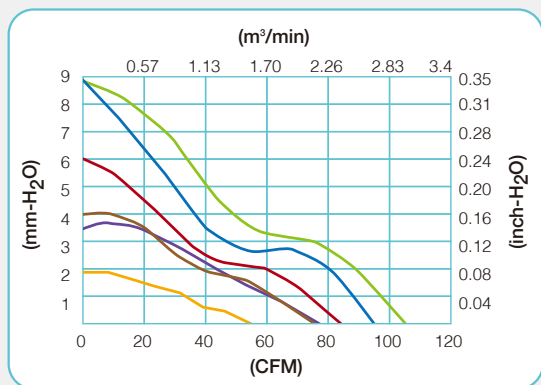

Model No.	Rated VAC	Freq. Hz	Rated Input Amp	Rated Input Watt	Rated Speed RPM	Max. Air Flow m³/min	Max. Air Flow CFM	Max. Static Pressure mm-H ₂ O	Max. Static Pressure inch-H ₂ O	Noise Level (dB)
型號	電壓	頻率	電流	功率	轉速	最大風量	最大風壓	最大風壓	噪音	
SK109AP-11-1	110 (100V~120V)	50/60	0.25/0.21	17/15	2650/3000	2.6/2.9	95/105	8.9/8.9	0.35/0.35	45/49
SK109AP-11-2	110 (100V~120V)	50/60	0.14/0.13	12/11	2500/2400	2.3/2.2	84/77	6.0/3.5	0.24/0.14	43/45
SK109AP-11-3	110 (100V~120V)	50/60	0.10/0.10	9/8	2300/1800	2.2/1.6	76/55	4.0/1.9	0.16/0.07	41/32
SK109AP-22-1	220 (200V~230V)	50/60	0.12/0.10	17/15	2650/3000	2.6/2.9	95/105	8.9/8.9	0.35/0.35	45/49
SK109AP-22-2	220 (200V~230V)	50/60	0.07/0.06	12/11	2500/2400	2.3/2.2	84/77	6.0/3.5	0.24/0.14	43/41
SK109AP-22-3	220 (200V~230V)	50	0.06	9	2050	2.2	76	4.0	0.16	36

Customised Item : Frameless, Double Voltage, FG,RD

